

AF382AC Electronic Faucet



Double Sensor



Faucet with Hot and Cold Water Supply

Spec. & Features

- ◆ Infrared Sensor : Automatic Operation
- ◆ Stable performance, infrared sensor performs perfectly even in the sunlight or any light.
- ◆ Waterproof, high quality and safety.
- ◆ Chrome Plated Cast Brass
- ◆ Liner Adapter : Input AC110V~AC220V 50/60 Hz. Output DC 6V
- ◆ Power Consumption : 0.3W (Idle), 5W (In use)
- ◆ Infrared Sensor Range : Wave Sensor (facing up) : 5cm (fixed)
Sensor (facing down) : 5cm~ 15cm (auto adjusted)
- ◆ Shut-off Delay Time : 1sec
- ◆ Time out Setting : Wave Sensor (facing up) : 3minutes
Sensor (facing down) : 1minute
- ◆ 0.5GPM or 1.0GPM Laminar Flow Spray Head
- ◆ Include Filter : it filters out articles in water hence reducing maintenance cost; easy to take out and clean
- ◆ With Integral Spout Temperature Mixer
- ◆ Operating Water Pressure : 10 to 100 PSI
- ◆ Water Supply Connection : 9/16-24UNEF
- ◆ Mounted on a Single-Hole Lavatory or Deck (35Φ~45Φ)
- ◆ Applicable Water Temperature : 39°F~150°F (4°C ~ 65°C)
- ◆ Warranty : 2 years
- ◆ Product Compliance : ASME A112.18.1 / CSA B125.1, NSF/ANSI 61
NSF/ANSI 372

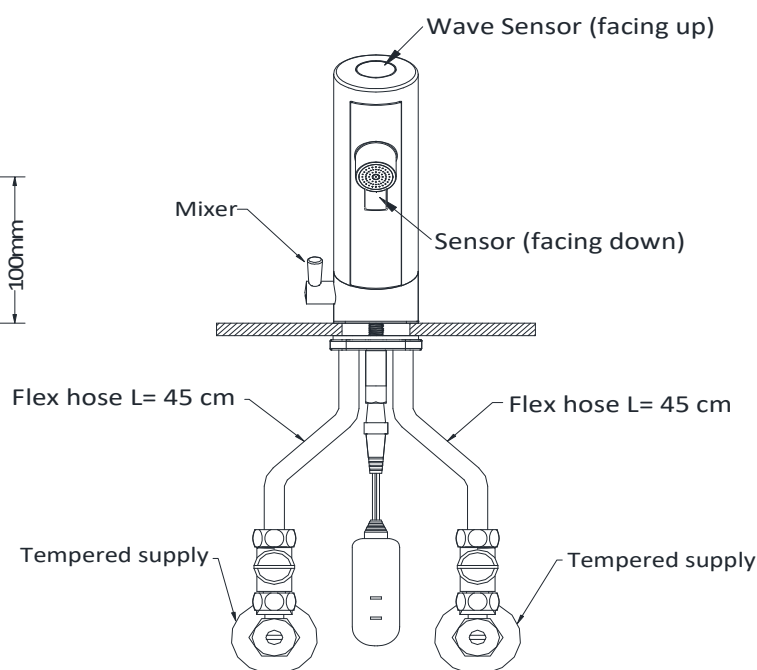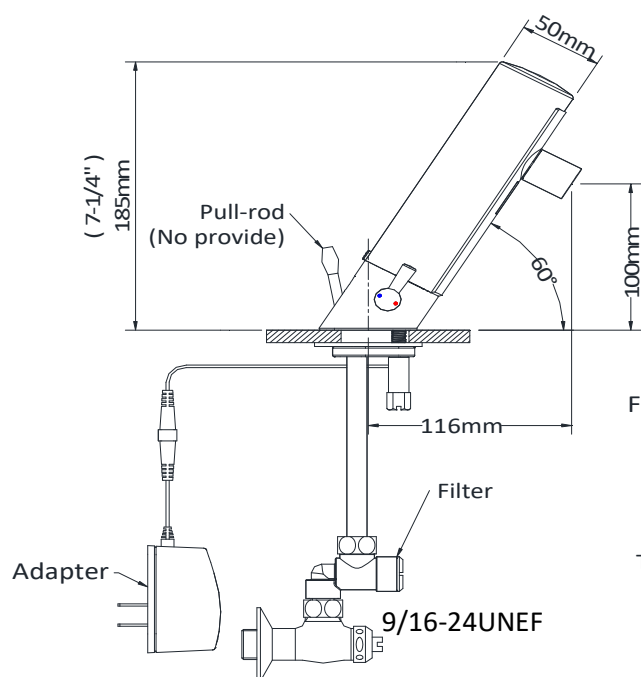

Wave Sensor (facing up) :

Activate water flow by waving your hand at the sensor.

To turn off the water, wave at the sensor again.

Sensor (facing down) :

The user's hands enter the sensor range to activate water flow.

The faucet automatically shuts off in 1 second after hands are moved away.

AF382DC Electronic Faucet



Double Sensor



Faucet with Hot and Cold Water Supply

Spec. & Features

- ◆ Infrared Sensor : Automatic Operation
- ◆ Stable performance, infrared sensor performs perfectly even in the sunlight or any light.
- ◆ Waterproof, high quality and safety.
- ◆ Chrome Plated Cast Brass
- ◆ Battery Life : 2 Years (Based on 3000 cycles per month)
- ◆ Power Consumption : 0.3W (Idle), 5W (In use)
- ◆ Infrared Sensor Range : Wave Sensor (facing up) : 5cm (fixed)
Sensor (facing down) : 5cm~ 15cm (auto adjusted)
- ◆ Shut-off Delay Time : 1sec
- ◆ Time out Setting : Wave Sensor (facing up) : 3minutes
Sensor (facing down) : 1minute
- ◆ 0.5GPM or 1.0GPM Laminar Flow Spray Head
- ◆ Include Filter : it filters out articles in water hence reducing maintenance cost; easy to take out and clean
- ◆ With Integral Spout Temperature Mixer
- ◆ Operating Water Pressure : 10 to 100 PSI
- ◆ Water Supply Connection : 9/16-24UNEF
- ◆ Mounted on a Single-Hole Lavatory or Deck (35Φ~45Φ)
- ◆ Applicable Water Temperature : 39°F~150°F (4°C ~ 65°C)
- ◆ Warranty : 2 years
- ◆ Product Compliance : ASME A112.18.1 / CSA B125.1, NSF/ANSI 61
NSF/ANSI 372

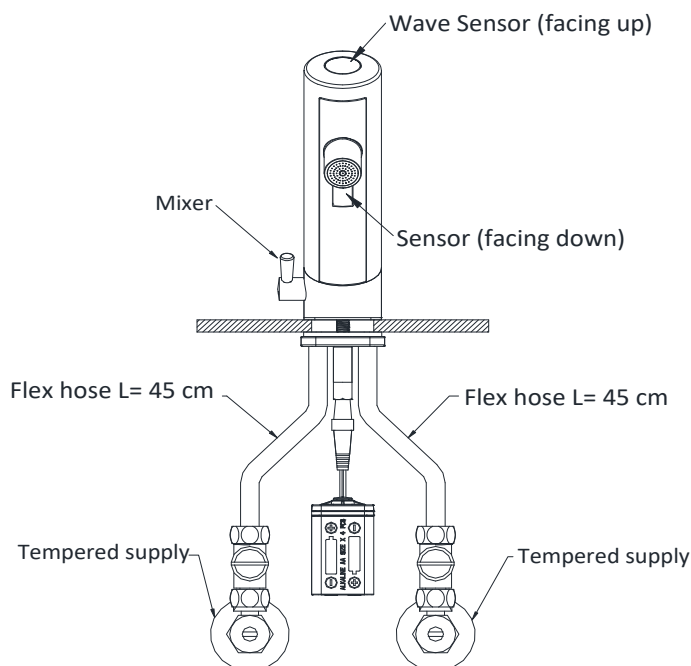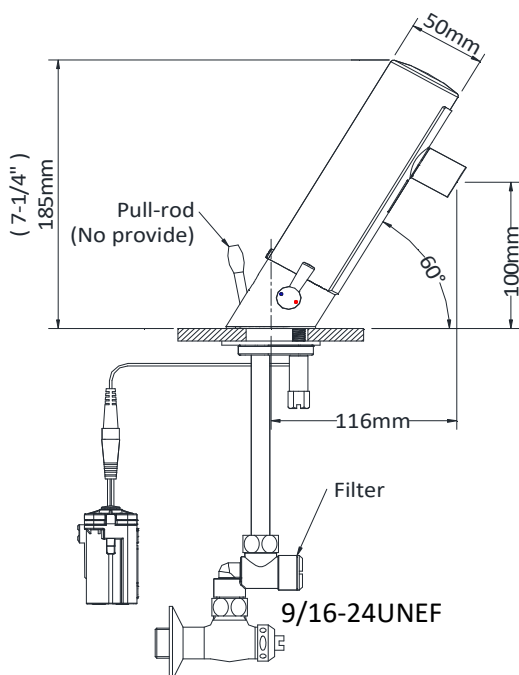

Wave Sensor (facing up) :

Activate water flow by waving your hand at the sensor.

To turn off the water, wave at the sensor again.

Sensor (facing down) :

The user's hands enter the sensor range to activate water flow.

The faucet automatically shuts off in 1 second after hands are moved away.